

FORM PTO-1390 (Modified)
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

194873US2PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/582637

INTERNATIONAL APPLICATION NO.
PCT/SE99/00121INTERNATIONAL FILING DATE
28 JANUARY 1999PRIORITY DATE CLAIMED
29 JANUARY 1998

TITLE OF INVENTION

IMPROVEMENTS IN, OR RELATING TO TELECOMMUNICATIONS

APPLICANT(S) FOR DO/EO/US

Sven-Rune OLOFSSON, et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 18 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☐ Certificate of Mailing by Express Mail
19. ☒ Other items or information:

Request for Consideration of Documents Cited in International Search Report

Notice of Priority

PCT/IB/304

PCT/IB/308

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/582637)	INTERNATIONAL APPLICATION NO. PCT/SE99/00121	ATTORNEY'S DOCKET NUMBER 194873US2PCT
--	---	--

20. The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :					
<input type="checkbox"/>	Search Report has been prepared by the EPO or JPO	\$840.00			
<input type="checkbox"/>	International preliminary examination fee paid to USPTO (37 CFR 1.482)	\$670.00			
<input type="checkbox"/>	No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))	\$760.00			
<input checked="" type="checkbox"/>	Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO	\$970.00			
<input type="checkbox"/>	International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)	\$96.00			
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$970.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	- 20 =	0	x \$18.00	\$0.00	
Independent claims	- 3 =	0	x \$78.00	\$0.00	
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,100.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).				<input type="checkbox"/>	\$0.00
SUBTOTAL =				\$1,100.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$1,100.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).				<input type="checkbox"/>	\$0.00
TOTAL FEES ENCLOSED =				\$1,100.00	
				Amount to be: refunded	\$
				charged	\$

- ☒ A check in the amount of **\$1,100.00** to cover the above fees is enclosed.
- ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **15-0030** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

NEUSTADT, P.C.



22850

Surinder Sachar
Registration No. 34,423

SIGNATURE

Marvin J. Spivak

NAME

24,913

REGISTRATION NUMBER

DATE

July 28, 2000

194873US

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF: :
SVEN-RUNE OLOFSSON ET AL : ATTN: NEW APPLICATION DIVISION
SERIAL NO: 09/582,637 :
FILED: JULY 28, 2000 :
FOR: IMPROVEMENTS IN, OR :
RELATING TO :
TELECOMMUNICATIONS :

AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Prior to a first examination on the merits, please amend the above-identified
application as follows:

IN THE CLAIMS

Please amend the claims as follows:

Claim 10, line 1, change "in any previous claim" to --claim 1--.

Claim 11, line 1, change "in any previous claim" to --claim 1--.

Claim 24, line 1, change "any of claims 16 to 23" to --claim 16--.

Claim 26, line 1, change "any of claims 16 to 25" to --claim 16--.

Claim 28, line 1, change "any of claims 13 to 26" to --claim 13--.

Claim 29, line 1, change "any of claims 13 to 28" to --claim 13--.

Claim 30, line 1, change "any of claims 13 to 28" to --claim 13--.

09/582637 102000

Claim 31, line 1, change "any of claims 13 to 29" to --claim 13--.

Claim 32, line 5, change "any of claims 1 to 12" to --claim 1--.

Claim 33, lines 4-5, change "any of claims 13 to 28" to --claim 13--.

REMARKS

Favorable consideration of this application, as presently amended, is respectfully requested.

The present Preliminary Amendment is presented to place the above-identified application in more proper format under United States practice. By the present Preliminary Amendment the claims have been amended to no longer recite any multiple dependencies.

The present application is believed to be in condition for a full and thorough examination on the merits. An early and favorable consideration of the present application is hereby respectfully requested.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Gregory J. Maier
Registration No. 25,599
Attorney of Record
Surinder Sachar
Registration No. 34,423



22850

(703) 413-3000
Fax #: (703) 413-2220
GJM:SNS/cct

I:\atty\SNS\194873US-pr.wpd

Improvements in, or Relating to Telecommunications

The present invention relates to:

- a POTS splitter, for separating analogue telephony signals from xDSL signals, including a line testing device;
- a telecommunications system, incorporating POTS splitters including line testing devices, at customer premises; and
- a method of testing a subscriber's line.

A network operator who wishes to introduce a broadband service, for instance xDSL (Digital Subscriber Line), must be able to measure certain parameters for a wire pair that is to be used to deliver the service. This is necessary both to ensure that the service can be successfully provided and to enable the network operator to guarantee service quality. There are many advantages if the measurements can be performed on a two sided basis. This means that a signal source capable of transmitting test messages/signals, upon request, must be placed at the customer's end of the line. The results of applying a test message/signal to the line at the customer's end are measured at the CO (Central Office) end. The present invention provides an active POTS splitter ("Plain Old Telephony Service" splitter) which includes this testing functionality.

When delivering a broadband service, such as xDSL, without inband POTS, it is necessary to separate the analogue POTS signal and the xDSL signal from each other at both the CO (Central Office) and the CP (Customer's Premises). This can be achieved by using analogue passive high pass and low pass filters. Figure 1, the accompanying drawing, illustrates this principle.

However, a passive POTS splitter design lacks the performance of an active splitter design, see J. Cook and P. Sheppard, "ADSL and VADSL Splitter Design and Telephony Performance", p.1634, December 1995, IEEE Journal on

Selected

Areas In Communications, ISSN 07-8716. This results in either:

- poorer POTS transmission; or
- if the cutoff frequency of the low pass filter in the splitter is increased, a waste of valuable spectrum that could otherwise be used to support higher data rates in the xDSL modem.

If an active POTS splitter design, with impedance matched circuits, is used, the filter design criteria become more reasonable while, at the same time, the spectrum, or bandwidth, use becomes more efficient, without degradation in the ordinary telephony transmission. The preferred solutions, especially as xDSL becomes more common, is the active POTS splitter design, or inband POTS (which implements the telephony service as a part of the xDSL data stream).

If the active splitter design is used and the splitter is implemented on a single chip, the present invention proposes the incorporation of test functionality for the line between the CP and the CO, or ONU (Optical Network Unit), on this chip. This enables two-sided measurements on the line, both during installation and during operation. The measurements are performed at the CO end upon request, or when the test device automatically sends a test message/signal. In this way there will be no need for field technicians at the CP side. If necessary these chip can have a unique identity code that is transmitted to the CO each time a test is started, or on receipt of a request from the CO.

The test messages/signals should either be specially designed for a certain measurement case, or general applicable signals which can be used with a range of tests, e.g. pulses, steps, or chirps, to estimate the transfer function of the line. One example of a parameter requiring two-sided measurement is attenuation. The test sequence could, in this case, be a series of sinusoidal signals, with known amplitude, sent from the test device to the CO, in sequence. The sequence can, for example, comprise 10, 100, or any other number, of tones, starting from either low, or high, frequency and then varying in frequency

towards the other side of the frequency spectrum. Each tone is transmitted for a relatively long period of time, so that synchronisation is not a problem and so that the measurement can be performed within the duration of a tone. The start of a test may occur at a predetermined time interval after a test message request.

According to a first aspect of the present invention, there is provided an active POTS splitter adapted to separate analogue POTS signals from xDSL signals, characterised in that said active POTS splitter incorporates line testing means.

Said testing means may be adapted to transmit a test signal, or test message, to a line to be tested.

Said test signal may be adapted for the performance of a specific line test.

Alternatively, said test signal may be of a general form capable of use with a range of different line tests.

Said test signal may comprise at least one pulse.

Said test signal may comprise at least one step.

Said test signal may comprise at least one chirp.

Said test signal may comprise a series of sinusoidal signals of known amplitude, each signal in said series having a different frequency, said series spanning a frequency range for which a line is to be tested.

Each tone of said series of sinusoidal signals may have a duration of a length sufficient to avoid problems associated with synchronisation and to permit a measurement to be completed within said duration.

Said test means may be adapted to transmit said test signal, or message, on receipt of a request signal.

A test facilitated by said test means may be initiated at a predetermined time interval after receipt of a request signal by said test means.

Said test means may be adapted to transmit said test signal, or message, automatically.

Said test means may be adapted to transmit said test signal, or message, in accordance with a predetermined schedule.

Said test means may have a unique identity code, and said test means may be adapted to transmit said unique identity code whenever a test signal, or message, is transmitted, or whenever an identification request signal is received.

Said test means may be adapted to short-circuit a line.

Said active POTS splitter, including said test means, may be implemented as a single chip.

Said chip may be mounted on a PCB connected to a line jack adapted for direct insertion into a customer premises line socket.

According to a second aspect of the present invention, there is provided, in a telecommunications system adapted to employ xDSL and POTS, and comprising at least one central office connected to a plurality of subscribers by subscriber lines, a method of measuring quality parameters relating to xDSL transmission on a subscriber line, characterised by the steps of:

- generating a test signal on said subscriber line at a subscriber's premises;
- performing measurements at said central station on said test signal as received at said central station; and

- deriving quality parameters for said subscriber line from said measurements.

Said test signal may be generated by causing said subscriber line to change from a high impedance state to a low impedance state.

Said test signal may be generated by causing a telephone to switch from an "on-hook" state to an "off-hook" state.

According to a third aspect of the present invention, there is provided, in a telecommunications system adapted to employ xDSL and POTS, and comprising at least one central office connected to a plurality of subscribers by subscriber lines, each subscriber premises being equipped with a POTS splitter, a method of measuring quality parameters relating to xDSL transmission on a subscriber line, characterised by the steps of:

- said POTS splitter generating a test signal on said subscriber line;
- performing measurements at said central station on said test signal as received at said central station; and
- deriving quality parameters for said subscriber line from said measurements.

Said test signal may be adapted for the performance of a specific line test.

Said test signal may be of a general form capable of use with a range of different line tests.

Said test signal may comprise at least one pulse.

Said test signal may comprise at least one step.

Said test signal may comprise at least one chirp.

Said test signal may comprise a series of sinusoidal signals of known amplitude, each signal in said series having a different frequency, said series spanning a frequency range for which a line is to be tested.

Each tone of said series of sinusoidal signals may have a duration of a length sufficient to avoid problems associated with synchronisation and to permit a measurement to be completed within said duration.

Said test signal , or message, may be transmitted on receipt of a request signal.

A test may be initiated at a predetermined time interval after receipt of a request signal.

Said test signal, or message, may be transmitted automatically.

Said test signal, or message, may be transmitted in accordance with a predetermined schedule.

Each POTS splitter may have a unique identity code, and said unique identity code may be transmitted whenever a test signal, or message, is transmitted, or when ever an identification request signal is received.

Said test signal may be generated by short-circuiting a line.

Results obtained from line tests may be collected and stored at said central office and a log of line condition for each subscriber line may be derived therefrom.

A plurality of results obtained from line tests may be collected and stored at said central office and said plurality of results may be averaged to obtain a composite result for each subscriber line.

According to a fourth aspect of the present invention, there is provided a telecommunications system adapted to employ POTS and xDSL, comprising at least one central office connected to a plurality of subscriber premises by subscriber lines, at least some of said subscriber premises having a POTS splitter located therein, characterised in that said POTS splitter is a POTS splitter as set forth in any preceding paragraph.

According to a fifth aspect of the present invention, there is provided a telecommunications system adapted to employ POTS and xDSL, comprising at least one central office connected to a plurality of subscriber premises by subscriber lines, at least some of said subscriber premises having a POTS splitter located therein, characterised in that said POTS splitter is adapted to measure subscriber line quality in accordance with a method as set forth in any preceding paragraph.

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawing, in which:

Figure 1 illustrates an overview of the way POTS splitters are located in an xDSL system.

As previously explained, when delivering a broadband service such as xDSL, without inband POTS, it is necessary to separate the analog POTS signal and the xDSL signal from each other at both the CO (Central Office) and the CP (Customers Premises). This can be done with analogue passive high pass and low pass filters and is illustrated in schematic form in Figure 1 which shows an overview of the principle. Referring briefly to Figure 1, it will be seen that the CO has a rack of LICs (Line Interface Cards) which include POTS splitters for separating analogue telephony signals and xDSL signals received from subscribers. At the subscriber end, there is a POTS splitter which separates analogue telephone signals and xDSL signals received from the CO. This scheme is equally applicable to passive and active POTS splitters.

Unfortunately, passive POTS splitters lack the performance of active

splitters. This results either in:

- degradation of transmission; or
- loss of xDSL spectrum.

The use of an active POTS splitter with impedance matched circuits gives more reasonable filter design criteria and more efficient use of xDSL spectrum.

The present invention proposes to capitalise on the advantages of active splitters by incorporating test functionality, for the line between the CP and the CO, or ONU (Optical Network Unit), in the POTS splitter and, preferably, implementing both the POTS splitter and test functionality in a single chip. This enables two-sided measurements on the line to be performed both during installation and operation. These measurements can be performed from the CO end either on request, or when the test device automatically sends a test message/signal. This avoids the need for field technicians at the CP side when line measurements are performed. The chip can be provided with a unique identity code that can be transmitted to the CO when ever a test is performed, or requested. The identity code can be associated with test data thus enabling a line to which the test data relates to be uniquely identified

The test messages/signals are either specially designed for a certain measurement case or, alternatively, general test messages/signals such as pulses, steps, or chirps, that can be used to estimate the transfer function of the line. A parameter that demands two-sided measurement is attenuation. The test sequence can, in this case, be a series of sinusoidal signals, with known amplitude, sent from the test device to the CO in sequence. The sequence can, for example, comprise 10, or 100, or any other number of tones, starting from either low, or high, frequency and then going towards the other side of the frequency spectrum.

Each tone is sent out for a relatively long period of time, so that synchronisation is not a problem. This also guarantees that the measurement is

completed within the duration of a tone. The test commences at a predetermined time interval after receipt of a test message request.

Another valuable facility that can be provided by the test device is the ability to open, or short-circuit, the line at the CP side on request from the CO. This enables the well known open/short-circuit measurement method, see SR Olofsson, Anders Isaksson & Joachim Johansson, "MEASUREMENT METHODS FOR WIRE PAIRS IN THE ACCESS NETWORK", 7/0363/2/FCPA 1.090013,97-10-20, to be performed.

It is also possible to let the POTS splitter, located at the CP, generate a test signal every time the customer picks up the receiver, i.e. the telephone instrument changes from an "on-hook" state to an "off-hook" state. Measurements are performed on these signals at the CO and the results of the measurements accumulated. In this case the test signal can, for example, be a step, pulse, or even a chirp. It may even be possible to carry out these measurements without the test device by using the step signal that is generated whenever a telephone goes from an "on-hook" high impedance state to an "off-hook" low impedance state. However, if this method is to be used, care must, of course, be taken to handle the contact bounces that are generated. The central concept behind the invention is still to generate numerous test messages and to save the results at the CO.

Another possibility is to program the active POTS splitter to send certain test messages in accordance with a predetermined schedule. At the CO side the LIC:s (Line Interface Cards) must have the functionality needed to measure and process the generated "on/off-hook" signal. If many such signals are collected and saved over a long period of time, the result can be used as a log of the line condition. A result calculated from a large set of accumulated data, i.e. many hook lifts, will naturally have higher precision than a result based on a single measurement.

In a typical application of the present invention, a customer calls Telia's Customers Services Department, CSD, and requests that he/she be provided with

Telia's newly announced "Superinternet Service" i.e. Telia's xDSL-service. The CSD tells the customer that they want to send him/her a test device, in other words, the active POTS splitter with line testing functionality, to check the quality of the line. When the customer receives the POTS splitter, he/she can instal it simply by inserting it in the telephony jack socket. It is then possible to perform measurements on the line from the CO. The results of these measurements can then be promptly sent to the customer. It may then be possible to deliver the service from the next day or, alternatively, some minor, or major, changes may have to be made to the network before the customer can be provided with the requested service. The test device and POTS splitter, of the present invention, can be produced very cheaply because of chip integration. This means that it is not necessary to retrieve the test device and POTS splitter, from the customer, if the line quality is insufficient for the provision of an xDSL service.

POTS splitters that separate the analogue POTS signal and the xDSL signal from each other are, advantageously, active, because of the inadequate performance of passive designs. Active POTS splitters can be realised on a single chip, so that a POTS splitter solution only requires one IC on a simple circuit board. At very little additional cost it is possible to implement testing functionality on this chip. With this functionality it is possible to send test messages from the test device/POTS splitter at the CP, upon receipt of a request from the CO end. At the CO end, measurements of the line quality can then be performed. When a customer asks for a xDSL, or other copper line based broad band service, the test device/POTS splitter can be sent to the customer's home and the customer can then install the POTS splitter/test device himself. The test device/POTS splitter is a low cost device which means that it can be sent to customers free of charge and customers can be allowed to keep these devices even if measurements performed it is not possible to install any broad band service. It is also possible to automatically generate test signals from the test device/POTS splitter, e.g. on every "hook lift", in order to get large numbers of test results that are accumulated at the CO side, possibly on modified Line Interface Cards, thus yielding better estimates of the line condition.

19-01-2000

ART 34 AMDT

11

CLAIMS

1. An active POTS splitter adapted to separate analogue POTS signals from xDSL signals, characterised in that said active POTS splitter incorporates line testing means adapted to transmit a test signal, or test message, to a line to be tested, said test means is adapted to transmit said signal, or message, automatically, or on receipt of a request signal, mentioned test means has a unique identity code, and in that said test means is adapted to transmit said unique identity code whenever a test signal, or message, is transmitted or whenever an identification request signal is received.
2. An active POTS splitter as claimed in 1, characterised in that said test signal is adapted for the performance of a specific line test.
3. An active POTS splitter, as claimed claim 1, or characterised in that said test signal is of a general form capable of use with a range of different line tests.
4. An active POTS splitter, as claimed in claim 3, characterised in that said test signal comprises at least one pulse.
5. An active POTS splitter, as claimed in claim 3, characterised in that said test signal comprises at least one step.
6. An active POTS splitter, as claimed in claim 3, characterised in that said test signal comprises at least one chirp.
7. An active POTS splitter, as claimed in claim 2, characterised in that said test signal comprises a series of sinusoidal signals of known amplitude, each signal in said series having a different frequency, said series spanning a frequency range for which a line is to be tested.
8. An active POTS splitter, as claimed in claim 7, characterised in that each tone of said series of sinusoidal signals has a duration of a length sufficient

AMENDED SHEET

PCI; SE 99/00121

19 -01- 2000

ART 34 AMDT

12

to avoid problems associated with synchronization and to permit a measurement to be completed within said duration.

5 9. An active POTS splitter, as claimed in claim 1, characterised in that said test means is adapted to transmit said test signal, or message, in accordance with a predetermined schedule.

10 10. An active POTS splitter, as claimed in any previous claim, characterised in that said test means is adapted to short-circuit a line.

15 11. An active POTS splitter, as claimed in any previous claim, characterised in that said active POTS splitter, including said test means, is implemented as a single chip.

20 12. An active POTS splitter, as claimed in claim 11, characterised in that said chip is mounted on a PCB connected to a line jack adapted for direct insertion into a customer premises line socket.

25 13. In a telecommunications system adapted to employ xDSL and POTS, and comprising at least one central office connected to a plurality of subscribers by subscriber lines, a method of measuring quality parameters relating to xDSL transmission on a subscriber line, characterised by the steps of:

- generating a test signal on said subscriber line at a subscriber's premises alternatively

-automatically

-at receiving of a request signal;

30 - a unique identity code is transmitted on mentioned subscriber line;

- performing measurements at said central station on said test signal as received at said central station; and

35
AMENDED SHEET

- deriving quality parameters for said subscriber line from said measurements.

14. A method, as claimed in claim 13, characterised by generating said test signal by causing said subscriber line to change from a high impedance state to a low impedance state.

15. A method as claimed in claim 13, characterised by generating said test signal by causing a telephone to switch from an "on-hook" state to an "off-hook" state.

16. In a telecommunications system adapted to employ xDSL and POTS, and comprising at least one central office connected to a plurality of subscribers by subscriber lines, each subscriber premises being equipped with a POTS splitter, a method of measuring quality parameters relating to xDSL transmission on a subscriber line, characterised by the steps of:

- said POTS splitter generating a test signal on said subscriber line alternatively

-automatically

-at receiving of a request signal;

- an identity code, unique to the POTS splitter, is transmitted whenever a test signal or message is transmitted, or whenever a request signal regarding identification is received;

- performing measurements at said central station on said test signal as received at said central station; and

- deriving quality parameters for said subscriber line from said measurements.

17. A method, as claimed in claim 16, characterised by said test signal being adapted for the performance of a specific line test.

PCI, SE **ART 34 AMDT**

19 -01- 2000

14

18. A method, as claimed in claim 16, characterised by said test signal being of a general form capable of use with a range of different line tests.

19. A method, as claimed in claim 18, characterised by said test signal comprising at least one pulse.

20. A method, as claimed in claim 18, characterised by said test signal comprising at least one step.

21. A method, as claimed in claim 18, characterised by said test signal comprising at least one chirp.

22. A method, as claimed in claim 17, characterised by said test signal comprising a series of sinusoidal signals of known amplitude, each signal in said series having a different frequency, said series spanning a frequency range for which a line is to be tested.

23. A method, as claimed in claim 22, characterised by each tone of said series of sinusoidal signals having a duration of a length sufficient to avoid problems associated with synchronisation and to permit a measurement to be completed within said duration.

24. A method, as claimed in any of claims 16 to 23, characterised by transmitting said test signal, or message, on receipt of a request signal.

25. A method, as claimed in claim 16, characterised by initiating a test at a predetermined time interval after receipt of a request signal.

26. A method, as claimed in any of claims 16 to 25, characterised by transmitting said test signal, or message, automatically.

27. A method, as claimed in claim 16, characterised by transmitting said test signal, or message, in accordance with a predetermined schedule.

AMENDED SHEET

28. A method, as claimed in any of claims 13 to 26, characterised by each POTS splitter having a unique identity code, and by transmitting said unique identity code whenever a test signal, or message, is transmitted, or whenever an identification request signal is received.
29. A method as claimed in any of claims 13 to 28, characterised by generating said test signal by short-circuiting a line.
30. A method, as claimed in any of claims 13 to 28, characterised by collecting and storing results obtained from line tests at said central office and deriving a log of line condition for each subscriber line therefrom.
31. A method, as claimed in any of claims 13 to 29, characterised by collecting and storing a plurality of results obtained from line tests at said central office and averaging said plurality of results to obtain a composite result for each subscriber line.
32. A telecommunications system adapted to employ POTS and xDSL, comprising at least one central office connected to a plurality of subscriber premises by subscriber lines, at least some of said subscriber premises having a POTS splitter located therein, characterised in that said POTS splitter is a POTS splitter as claimed in any of claims 1 to 12.
33. A telecommunications system adapted to employ POTS and xDSL, comprising at least one central office connected to a plurality of subscriber premises by subscriber lines, at least some of said subscriber premises having a POTS splitter located therein, characterised in that said POTS splitter is adapted to measure subscriber line quality in accordance with the method claimed in any of claims 13 to 28.

000207 26929360

WO 99/39498

1/1

09/582637
09/582637

PCT/SE99/00121

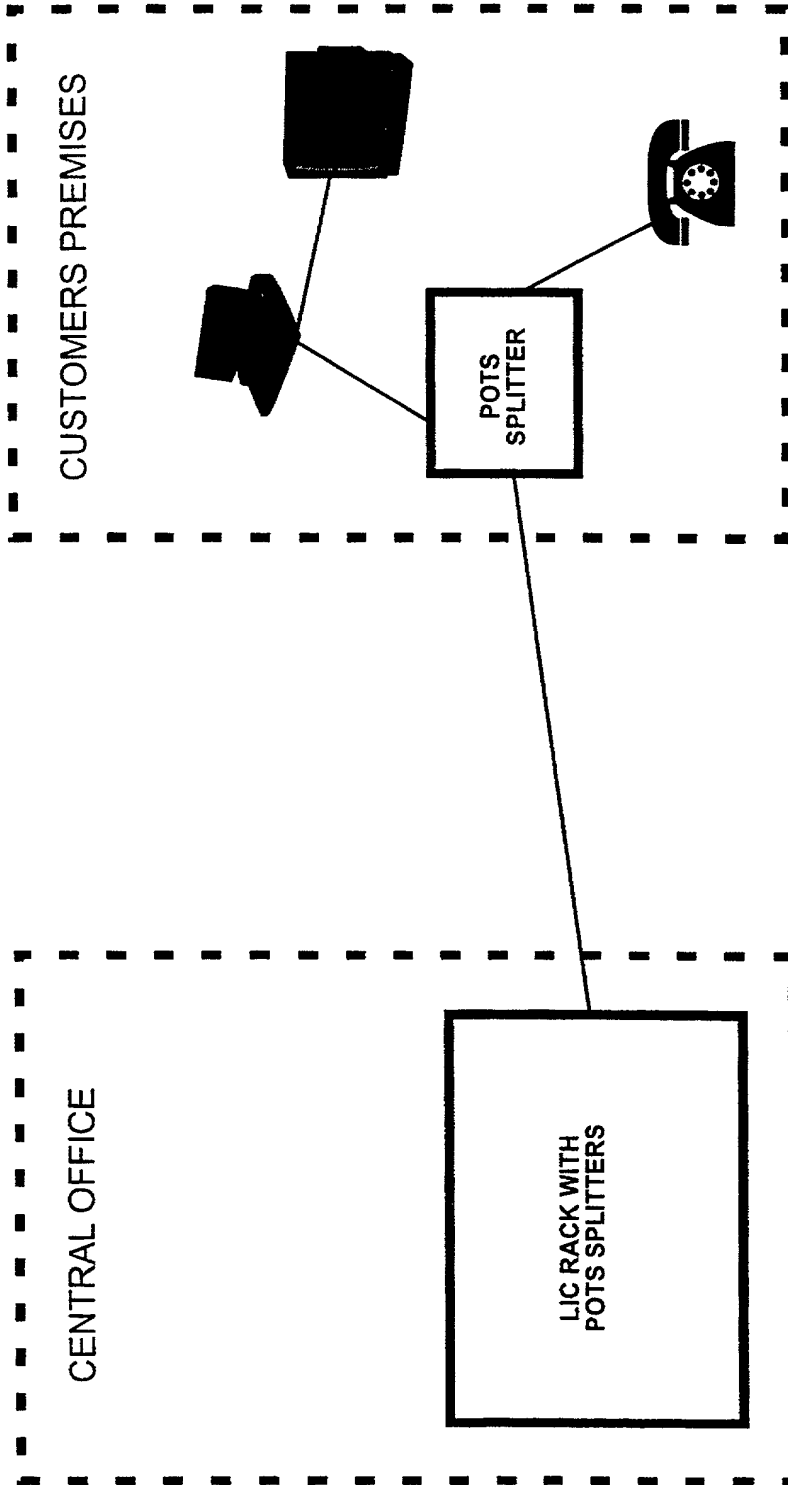


FIGURE 1

Declaration, Power Of Attorney and Petition

Page 1 of 5

WE (I) the undersigned inventor(s), hereby declare(s) that:

My residence, post office address and citizenship are as stated below next to my name,

We (I) believe that we are (I am) the original, first, and joint (sole) inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMPROVEMENTS IN, OR RELATING TO TELECOMMUNICATIONS

the specification of which

☐ is attached hereto.

☒ was filed on 28 July 2000 as

Application Serial No. 09/582,637

and amended on

☒ was filed as PCT international application

Number PCT/SE99/00121

on 28 January 1999,

and was amended under PCT Article 19

on (if applicable).

We (I) hereby state that we (I) have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We (I) acknowledge the duty to disclose information known to be material to the patentability of this application as defined in Section 1.56 of Title 37 Code of Federal Regulations.

We (I) hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed. Prior Foreign Application(s)

Application No.	Country	Day/Month/Year	Priority Claimed
9800249-6	SWEDEN	29 January 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

We (I) hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

We (I) hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

Application Serial No.	Filing Date	Status (pending, patented, abandoned)
<u>PCT/SE99/00121</u>	<u>28 January 1999</u>	_____
_____	_____	_____
_____	_____	_____

And we (I) hereby appoint: Norman F. Oblon, Reg. No. 24,618; Marvin J. Spivak, Reg. No. 24,913; C. Irvin McClelland, Reg. No. 21,124; Gregory J. Maier, Reg. No. 25,599; Arthur I. Neustadt, Reg. No. 24,854; Richard D. Kelly, Reg. No. 27,757; James D. Hamilton, Reg. No. 28,421; Eckhard H. Kuesters, Reg. No. 28,870; Robert T. Pous, Reg. No. 29,099; Charles L. Gholz, Reg. No. 26,395; William E. Beaumont, Reg. No. 30,996; Jean-Paul Lavalleye, Reg. No. 31,451; Stephen G. Baxter, Reg. No. 32,884; Richard L. Treanor, Reg. No. 36,379; Steven P. Weihrouch, Reg. No. 32,829; John T. Goolkasian, Reg. No. 26,142; Richard L. Chinn, Reg. No. 34,305; Steven E. Lipman, Reg. No. 30,011; Carl E. Schlier, Reg. No. 34,426; James J. Kulbaski, Reg. No. 34,648; Richard A. Neifeld, Reg. No. 35,299; J. Derek Mason, Reg. No. 35,270; Surinder Sachar, Reg. No. 34,423; Christina M. Gadiano, Reg. No. 37,628; Jeffrey B. McIntyre, Reg. No. 36,867; William T. Enos, Reg. No. 33,128; Michael E. McCabe, Jr., Reg. No. 37,182; Bradley D. Lytle, Reg. No. 40,073; and Michael R. Casey, Reg. No. 40,294; our (my) attorneys, with full powers of substitution and revocation, to prosecute this application and to transact all business in the Patent Office connected therewith; and we (I) hereby request that all correspondence regarding this application be sent to the firm of OBLON, SPIVAK, McCLELLAND, MAIER & NEUSTADT, P.C., whose Post Office Address is: Fourth Floor, 1755 Jefferson Davis Highway, Arlington, Virginia 22202.

We (I) declare that all statements made herein of our (my) own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1-00 Sven-Rune OLOFSSON
NAME OF FIRST ~~SOLE~~ INVENTOR


Signature of Inventor

2000-09-25
Date

Residence: Malmuddsvagen 9, S-972 45 Lulea,
SWEDEN SEX.

Citizen of: SWEDEN

Post Office Address: same as above

2-00 Lennart OLSSON
NAME OF SECOND JOINT INVENTOR

Lennart Olsson
Signature of Inventor

2000-09-25
Date

Residence: Majvagen 39, S-973 31 Lulea,
SWEDEN SEX

Citizen of: SWEDEN

Post Office Address: same as above

3-00 Joachim JOHANSSON
NAME OF THIRD JOINT INVENTOR

Joachim Johansson
Signature of Inventor

2000-09-26
Date

Residence: Professorsvagen 11, 5tr,
S-977 51 Lulea, SWEDEN SEX

Citizen of: SWEDEN

Post Office Address: same as above

4-00 Hans OHMAN
NAME OF FOURTH JOINT INVENTOR

Hans Ohman
Signature of Inventor

2000-09-27
Date

Residence: Faltspatstigen 21, S-977 53
Lulea, SWEDEN SEX

Citizen of: SWEDEN

Post Office Address: same as above

5-00 Mikael ISAKSSON
NAME OF FIFTH JOINT INVENTOR

Mikael Isaksson
Signature of Inventor

00-09-25
Date

Residence: Borgmastarevagen 7,
S-973 42 Lulea, SWEDEN SEX

Citizen of: SWEDEN

Post Office Address: same as above

6-00 Magnus JOHANSSON
NAME OF SIXTH JOINT INVENTOR

Magnus Johansson
Signature of Inventor

2000-09-25
Date

Residence: Timmermansgatan 34,
S-972 41 Lulea, SWEDEN SEX.

Citizen of: SWEDEN

Post Office Address: same as above

7-00 Tomas STEFANSSON
NAME OF SEVENTH JOINT INVENTOR

Tomas Sten
Signature of Inventor

2000-09-25
Date

Residence: Lulavan 773, S-961 93
Boden, SWEDEN SEX.

Citizen of: SWEDEN

Post Office Address: same as above

8-00 Gunnar BAHLENBERG
NAME OF EIGHTH JOINT INVENTOR

Gunnar Bahlenberg
Signature of Inventor

2000-09-25
Date

Residence: Blidvagen 234, S-976 32
Lulea, SWEDEN SEX.

Citizen of: SWEDEN

Post Office Address: same as above

9-00 Anders ISAKSSON
NAME OF NINTH JOINT INVENTOR

Anders Isaksson
Signature of Inventor

2000-09-25
Date

Residence: Elevvagen 1, S-977 25
Lulea, SWEDEN

Citizen of: SWEDEN

Post Office Address: same as above

10-00 Goran OKVIST
NAME OF ~~SIXTH~~ JOINT INVENTOR
TENTH

GFL
Signature of Inventor

2000-09-23
Date

Residence: Hagaplan 7, S-974 41
Lulea, SWEDEN SEX

Citizen of: SWEDEN -

Post Office Address: same as above

11-00 Lis-Marie LJUNGGREN
NAME OF ~~SEVENTH~~ JOINT INVENTOR
ELEVENTH

Lis-Marie Ljunggren
Signature of Inventor

2000-09-28
Date

Residence: Praktikantvagen 31,
S-977 53 Lulea, SWEDEN SEX

Citizen of: SWEDEN -

Post Office Address: same as above

12-00 Daniel BENGTTSSON
NAME OF ~~EIGHTH~~ JOINT INVENTOR
TWELFTH

Daniel Bengtsson
Signature of Inventor

2000-09-25
Date

Residence: Forskarvagen 36A,
S-977 53 Lulea, SWEDEN SEX

Citizen of: SWEDEN -

Post Office Address: same as above

NAME OF ~~NINTH~~ JOINT INVENTOR

Signature of Inventor

Date

Residence: _____

Citizen of: _____

Post Office Address: _____